

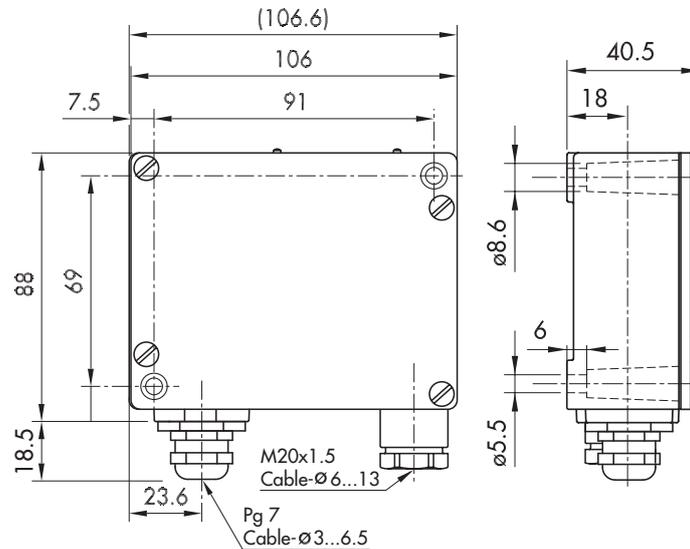


Massbilder / Cotes d'encombrement / Dimensions



Ausgangssignal
Signal de sortie
Output signal 4...20 mA

Elektrischer Anschluss
Raccordement électrique
Electrical connection



Anschlussquerschnitt / Section de raccord / Cross section for connection

0.1 ... 2.5 mm²

Betriebstemperatur / Température de service / Operating temperature


-40°C ... +85°C

Lagertemperatur / Température de stockage / Storage temperature


-40°C ... +85°C

Bereich / Plage / Range




Bereich	-50 ... 50	°C	01
Plage	0 ... 50		12
Range	0 ... 100		02
	0 ... 150		03
	0 ... 200		05
	0 ... 300		07
	0 ... 400		06
	0 ... 550		13

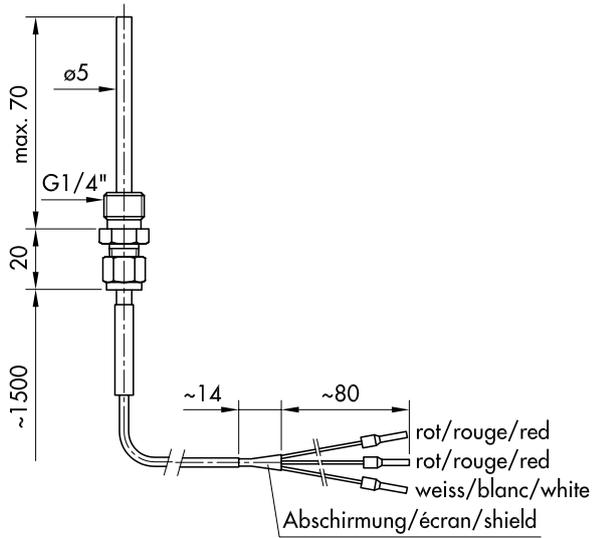

XXXX.XX.1003.XX
-50...250°C

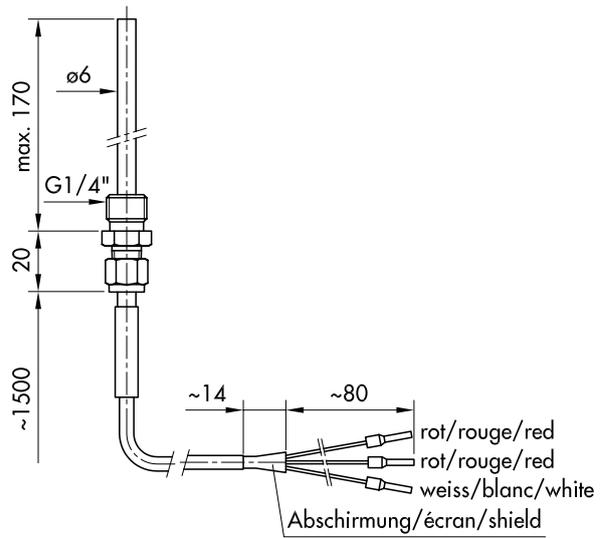

XXXX.XX.1013.XX
0...550°C

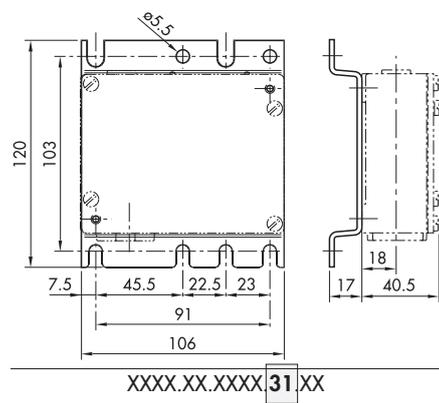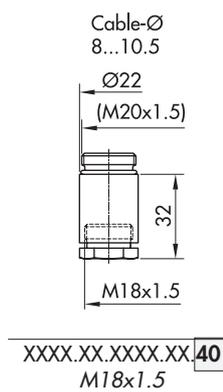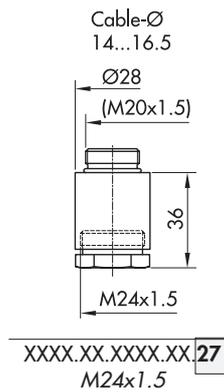

H73102c Trafag AG 01/2010 (print date 01/2011)

We reserve the right to make alterations as technical progress may warrant.